


Apollo 2 Series Tunnel Light

- Super industrial design, streamline and elegant appearance.
- Adopt modular design with compact structure, lightness for easy maintenance.
- Circular module with surface self-clean function.
- Light distribution precision, high utilization of light, more energy saving.
- Lightning surge prevention system ensures reliability and stability.

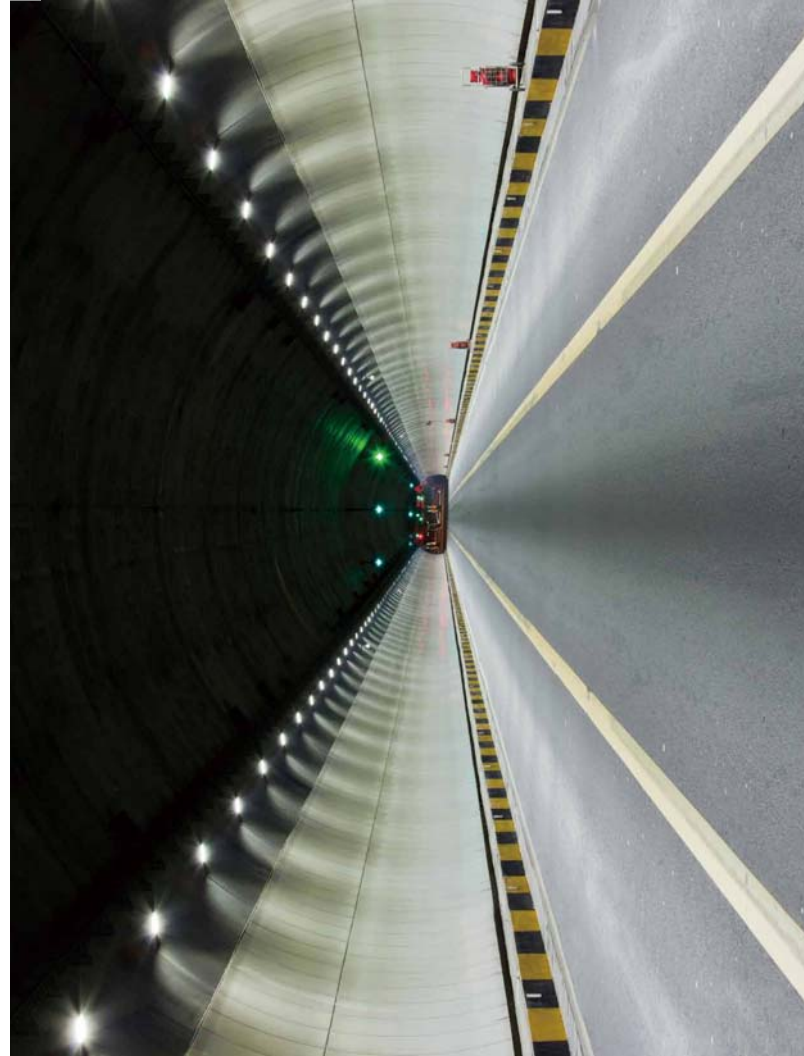

IP 65

UV Time
5000hrs

Working Temp
-40°C ~ 55°C


Moisture
< 95%

Item No.	System Power (W)	Module Qty	Lumen Output 5000K (lm)	CCT	Driver Efficiency	Dimension(mm)
TL2K1080	75	2	7500	4000K	>92%	L284xW301xH254
TL2K1120	115	3	11500	4000K	>92%	L369xW301xH254
TL2K1160	150	4	15000	4000K	>92%	L454xW301xH254
TL2K1240	230	6	23000	4000K	>92%	L624xW301xH254


Ordering Information

1 System Power	1080: 75W	1120: 115W	1160: 150W	1240: 230W
2 Light Distribution	A2			
3 Color Temp	30: 3000±300K	40: 4000±300K	50: 5000±300K	
4 Housing Color	CG: Cold Grey	SG: Silver Grey	BK: Black	DB: Dark Blue
5 Input Voltage	AZ: AC 220/240 V VZ: AC 120/27V			
6 Control Mode	0: Without	1: Timer	2: ZigBee	6: Protocol
		0-10V Dim	Dial Control	F.C.

TL2K 1080 A2 50 DB VZ 1 1
1 2 3 4 5 6

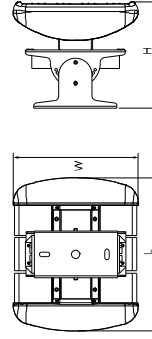

Light Distribution Curve



Luminaire beam unit: 40°
Lens Code : A2S121
Type II